

Authorized Installer For Tamarack Technologies Door and Wall Return Air Pathways products



The Perfect Balance in-door Return Air Pathway (RAP) and the interior wall RAP will balance interior air pressure between rooms, create an even flow of air throughout the home, remove hot and cold spots, helps to obtain Energy Star rating and reduce the strain on the blower motor while improving the energy efficiency of an HVAC central system.

Here in Southwest Florida many of the older homes have retrofitted HVAC Air Conditioning systems. The older homes were not designed or built for AC so the interior doors are usually cut off at the bottom to let "some" of the cool air circulate and return to the air handler.



LISTED
PRODUCT



The thru-the-wall-model comes in several sizes.

12 x 4 thru-wall

12 x 6 thru-wall


12 x 12 thru-wall

14 x 6 thru-wall

14 x 8 thru-wall



LISTED
PRODUCT

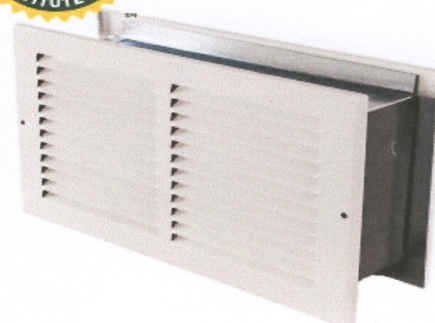



I can add these door vents to the bottom of the cut off doors for you, returning them to a full length door, improving the air flow and air quality in your home.



Return Air Pathways

If you prefer we can install a thru-the-wall unit above each interior door. This also improves the comfort in your home.

Either way they both improve the comfort in your home and by keeping the air flowing helps reduce musty odors, mold and mildew.

However, with the door vent added to an already cut off door, you won't have that light from under the doors or hear everything going on in the bathroom or bedroom as they dampen both light and noise.

Get in touch with me and I can explain more about this product or review the company brochure below.

Call or Text
Ph (941)-240-6554

email
rick@dreamcraftsman.com

Your Dream Craftsman

Return Air Pathway



The HV1600 Wi-Fi Whole House Fan

- Convenient Wi-Fi Controlled
- Mechanically Sealed Doors
- Insulated up to R50
- Horizontal or Vertical Installation
- Fits 16" or 24" On Center Joists
- No Joist Cutting Necessary
- 3 Year Limited Warranty
- Assembled in the USA
- Easy Installation
- No Maintenance
- WiFi Controlled
- 1600 CFM High Speed
- 1150 CFM Low Speed
- 6' Line Cord



Just Tap the App and Set the Fan!



The Ghost HV3400 Wi-Fi Whole House Fan

- Convenient Wi-Fi Controlled
- Easy Installation
- No Maintenance
- 3400 CFM High Speed
- 1900 CFM Low Speed
- 6' Line Cord
- Mechanically Sealed Doors
- Insulated to R 38 or R 50

P/N RAP.11



Simple Pressure Imbalance Encourages Mold Growth

Closing a bedroom door will cause a pressure imbalance in homes that have central air returns. This pressure imbalance causes the air handler to work harder and be less efficient. If you install a R.A.P. or Perfect Balance, this will allow the air that's trapped by the closed door to return to the central air return. Thus allowing better air-flow and a much more efficient HVAC system and will eliminate the hot and cold spots in unbalanced rooms.

- ✓ All new construction models include a sheetrock flange.
- ✓ The depth between the flanges is 3 1/2".
- ✓ The overall depth is 4 3/4".
- ✓ Each unit comes with a pair of white grilles.



FATENTED
Perfect Balance In-Door
Air Pressure Relief System



GET THE TAMARACK R.A.P.


(RETURN AIR PATHWAY)
Balances Pressure
Prevents Mold
and Mildew!

We are the **V** in HVAC!™



Tamarack Technologies
R.A.P Transfer Grilles
Now BPI Listed
Look For The Seal!
tamtech.com
1-800-222-5932

You Can't Beat the R.A.P. for Healthy Air Pressure Balance!

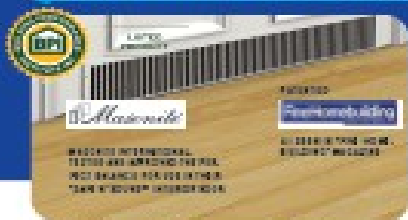

Perfect Balance In-Door Air Pressure Relief System



- Patented
- Eliminates pressure imbalance
- Allows HVAC systems to run efficiently
- Made in USA. Lifetime guarantee
- Inexpensive
- Easy to install
- Durable high-impact plastic
- No moving parts
- Replaces crossbars or jump ducts, makes grille ducted to furnace or air conditioner
- Noise and light diminishing grille and bulk combination

SPECIFICATIONS

Product Length	27"-34"
Grille Length	32"
Height	4-3/4"
Depth	1-5/8"
Color	White (Paintable)
CFM @ 5 Pascals	156 CFM

Tamarack Technologies will never be your manufacturer's limited warranty when installing the Perfect Balance® Door R.A.P. Tamarack will DOUBLE the warranty period from 1 year to 2 years. (Please visit the appropriate door manufacturer's website for their specific warranty details.)



One Piece Frame for New Construction



Telescoping Frame for Existing Construction

New Construction R.A.P. Specifications

Size	Rough Opening	Grille Dimensions	Flange Dimensions	Air Flow @ 5 pascals
12.4N	12 1/2" x 4 1/2"	12 1/2" x 5 1/2"	14 1/2" x 6"	61 CFM
12.6N	12 1/2" x 6"	12 1/2" x 7 1/2"	14 1/2" x 8 1/2"	82 CFM
12.12N	12 1/2" x 12 1/2"	12 1/2" x 12 1/2"	14 1/2" x 14"	174 CFM
14.8N	14 1/2" x 6 1/2"	14 1/2" x 8 1/2"	16 1/2" x 9 1/2"	146 CFM
14.6N	14 1/2" x 6 1/2"	14 1/2" x 7 1/2"	16 1/2" x 7 1/2"	117 CFM

All Dimensions Tolerance +.125" / -.000"

Retrofit R.A.P. Specifications

Size	Rough Opening	Grille Dimensions	Flange Dimensions	Air Flow @ 5 pascals
12.4R	12 1/2" x 4 1/2"	12 1/2" x 5 1/2"	13 1/2" x 5 1/2"	61 CFM
12.6R	12 1/2" x 6"	12 1/2" x 7 1/2"	13 1/2" x 7 1/2"	82 CFM
12.12R	12 1/2" x 12 1/2"	12 1/2" x 12 1/2"	13 1/2" x 13 1/2"	174 CFM
14.8R	14 1/2" x 6 1/2"	14 1/2" x 8 1/2"	15 1/2" x 9 1/2"	146 CFM
14.6R	14 1/2" x 6 1/2"	14 1/2" x 7 1/2"	15 1/2" x 7 1/2"	117 CFM

All Dimensions Tolerance +.125" / -.000"



800-222-5932

Get the R.A.P.

- Economical
- Easy Installation
- Innovative Design
- No Mechanical Parts
- Made In The USA
- Dampens Light and Sound
- The Door R.A.P. fits a standard 1 3/8" hollow core door.